



# MASTER SON-T PIA Plus



## MST SON-T PIA Plus 150W/220 E40 - 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

#### **Warnings and Safety**

- · Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information					
Cap-Base	E40				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	36,000 hour(s)				
Light Technical					
Color Code	220 [CCT of 2000K]				
Luminous Flux	17,800 lm				
Chromaticity Coordinate X (Nom)	0.535				
Chromaticity Coordinate Y (Nom)	0.42				
Correlated Color Temperature (Nom)	2000 K				
Luminous Efficacy (rated) (Nom)	115.16 lm/W				
Color rendering index (CRI)	-				
Arc Length O (Nom)	61 mm				

Operating and Electrical	
Power Consumption	155.0 W
Voltage (Nom)	104 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46
Net Weight (Piece)	0.142 kg
Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	15.1 mg
Mercury (Hg) Content (Nom)	15 mg
Energy Consumption kWh/1000 h	155 kWh


Datasheet, 2025, April 16 data subject to change

## **MASTER SON-T PIA Plus**

EPREL Registration Number	473383
Product Data	
Order product name	MST SON-T PIA Plus 150W/220 E40 - 1SL/12
Full product name	MST SON-T PIA Plus 150W/220 E40 - 1SL/12
Full product code	871150019229515
Order code	928150909230


Material Nr. (12NC)	928150909230
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500192295
Numerator - Packs per outer box	12
EAN/UPC - Case	8711500192721


## Dimensional drawing




Product	D (max)	0	L	C (max)
MST SON-T PIA Plus 150W/220 E40 - 1SL/12	48 mm	61 mm	132 mm	210 mm

## Photometric data





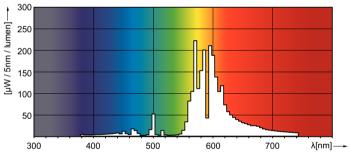



Light Distribution Diagram - MST SON-T PIA Plus 150W/220 E40 - 1SL/12

Spectral Power Distribution Colour - MST SON-T PIA Plus 150W/220 E40 - 1SL/12

## **MASTER SON-T PIA Plus**

#### Lifetime

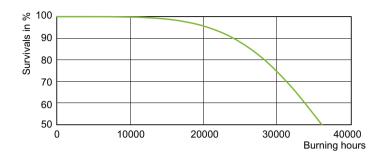

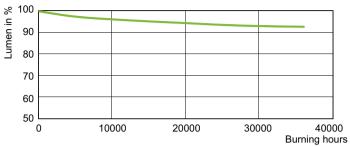

LDLE\_SON-TPIA\_0003-Life expectancy diagram

Lumen Maintenance Diagram - MST SON-T PIA Plus 150W/220 E40 - 1SL/12



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.