

SCHUKO® socket, 16 A 250 V ~, with USB charger, 1 x type A + 1 x type C, Safety Plus, LS range, stainless steel



Reference number:	ES 1520-15 CA
EAN/GTIN:	4011377214071
Color:	stainless steel
Material:	metal

- Individual colour printing possible
- Individual laser engraving possible

Metal versions

with enhanced contact protection / shutter (Safety Plus)

with 1 USB port type A and 1 USB port type C

with screwless terminals for rigid and untreated flexible wires up to 2.5 mm²

Installation in flush box with dimensions according to DIN 49073

depth of flush box (inner dimension): min. 57 mm


Accessories:

Frame 28 mm structure height ref.-no.: LS 98.. HBF ..

Technical data

Rated voltage:	AC 220 ... 250 V ~
Mains frequency:	50/60 Hz
Rated current:	16 A
Output voltage USB:	DC 5 V
Output current USB (total):	3 A
Stand-by power:	≤ 25 mW
Ambient temperature:	+5 ... +35 °C
Storage/transport temperature:	-20 ... +70 °C
Connection mode:	screwless terminals

Dimensions

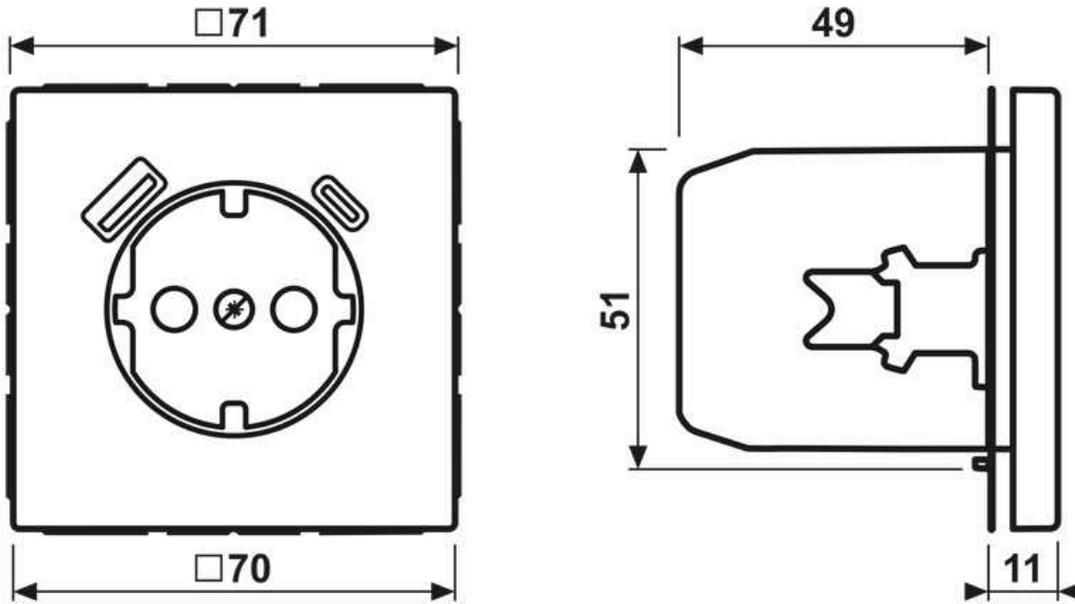

Assembly

