

# Farsund Slim 300



## Farsund Slim 300 Black 1710lm 3000K Ra>80 Trailing edge

SG code: 113310  
EAN: 7021981133108



### Electrical

System wattage: 14W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 130, B16: 200, C10: 130, C16: 200

### Light technic

Type of light source: LED  
Luminous flux: 1710lm  
Efficacy: 122 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90/B50>50,000  
Minimum ambient temperature: -20°C  
Light distribution: Direct  
Beam angle: 109°  
UGR: UGR<25  
Visible flicker (PstLM): 0.01  
Stroboscopic flicker (SVM): 0.01

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Polycarbonat (PC)  
Colour: Black  
Optics: Plastic, opal

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 29  
Diameter (mm) D: 302  
Weight (kg) gross/net: 1.071 / 0.942

### Packaging

Packing dimensions (mm): 316 x 316 x 34

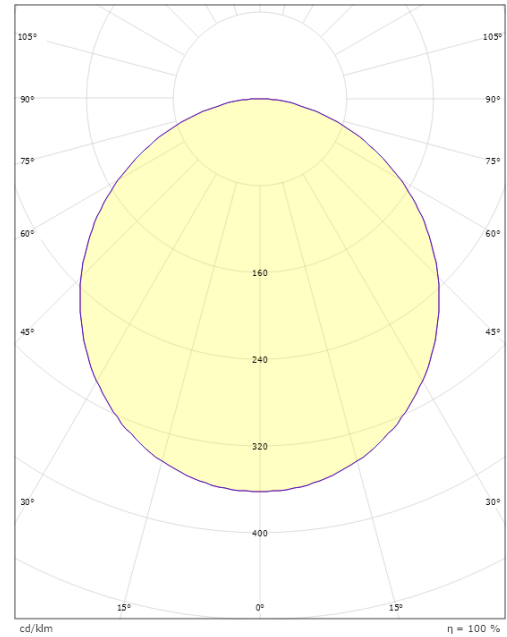

— C0/C180  
— C90/C270

