

ROBUS®


FLEXI-STRIPS

VEGAS TUNEABLE

9.6W/m, 19.2W/m, 12V, 24V, IP20, IP67



IP20

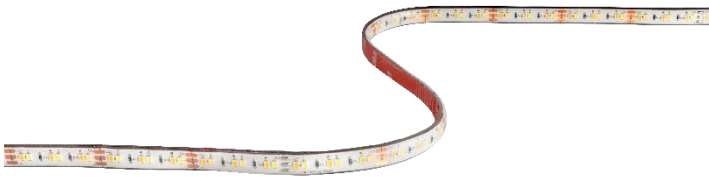

IP67





PRODUCT INFORMATION DOCUMENT

FEATURES

- Unique design of the strip allows smooth transition of light colour temperature range between 2700K and 6500K
- IP20 and IP67 versions for indoor and outdoor applications
- Can be cut every 5cm or 8cm (12V and 24V respectively) and reconnected as required. Cut-And-Connect service available through our Emergency Conversions Unit
- Maximum continuous strip run of 10m
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories

CONSTRUCTION

- FPC copper substrate PCB
- 500mm 2x18AWG input wires



Product Code:	12V		24V	
	IP20	IP67	IP20	IP67
	RVA96CCT22050	RVA96CCT26730	RVA192CCT22050	RVA192CCT26730
Comparable to:	NA	NA	NA	NA
Total Power (W):	5.7-9.6	6.0-9.6	11.2-19.2	11.7-19.2
Power Factor:	NA	NA	NA	NA
Total Light Output (lm):	520-910	430-800	940-1780	800-1520
Total Emergency Light Output (lm):	NA	NA	NA	NA
Efficacy (lm/cctW):	88-94	72-83	83-92	67-79
Lux at 1m (lux):	160-170	110-120	290-330	200-220
Emergency Lux at 1m (lux):	NA	NA	NA	NA
CCT (K):	2700-6500	2700-6500	2700-6500	2700-6500
CRI:	80	80	80	80
IP:	20	20	67	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40		-20 ≤ Ta ≤ +40	
Inrush Current:	NA	NA	NA	NA
RG Value:	0	0	0	0
SDCM:	6	6	6	6
P _{ST} LM:	NA	NA	NA	NA
SVM:	NA	NA	NA	NA
Energy Class:	F	G	G	G
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000
Dimensions LxWxH (mm):	50000x10x2	30000x12x4	50000x10x2	30000x12x4
Weight (kg):	0.016	0.065	0.016	0.065

Separate Control Gear Information				
Type of Light Source:	LED	LED	LED	LED
Full Load Efficiency (%):	NA	NA	NA	NA
P _{NET} (W):	NA	NA	NA	NA
Dimensions (mm):	NA	NA	NA	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
 WEB: ROB.US.COM
 WEB: ROB.US.COM.AU
 WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

Cone Illuminance Diagram

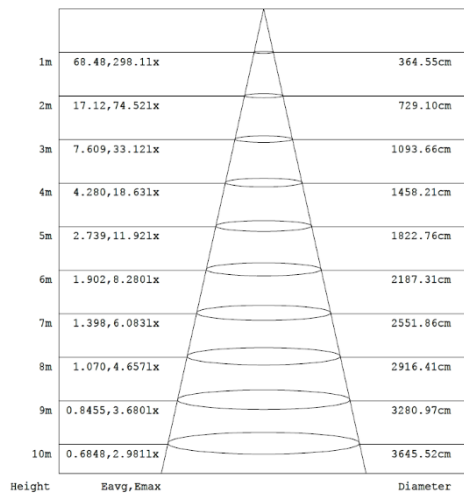


Diagram for RVA192CCT22050 in 6500K. Other diagrams available on request

Polar Intensity Diagram


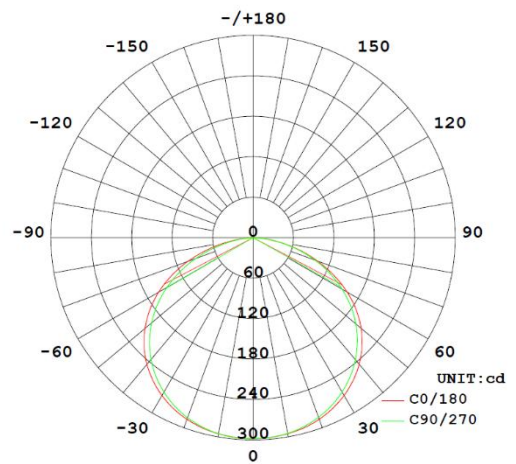


Diagram for RVA192CCT22050 in 6500K. Other diagrams available on request

Dimension Diagram

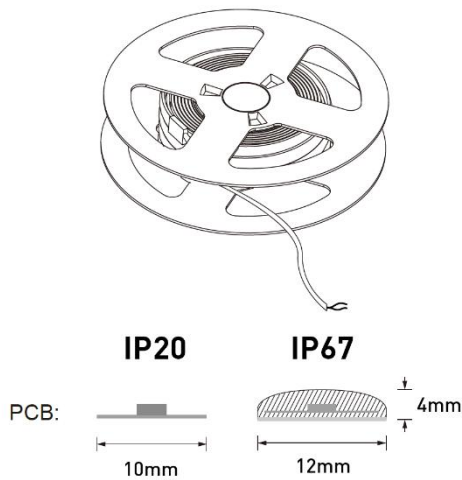

Accessories

RVACCTS

VEGAS CCT Switch Accessory for Tuneable Strips

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA