


XPJ 3G2.5

Copper core installation cable

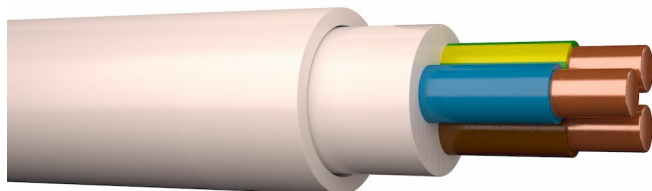

APPLICATION

For fixed surface or flush-mounted installations, indoors and outdoors. Suitable for installation in a slot covered with a plaster. Not for installation directly in ground or directly in concrete without protective ducting. Cable needs protection from direct sunlight.

CERTIFICATIONS AND DESIGN STANDARDS

EVS 720:2015

EN 60228

EN 50575:2014/A1:2016

EN 50525-1

HD 308 S2

EN 60332-1-2

PVC sheathed wiring cable

Conductor standard

Cables for general applications in construction works subject to reaction to fire requirements

Low voltage energy cables of rated voltages up to and including 450/750 V (U0/U)

Identification of cores in cables and flexible cords

Vertical flame propagation for a single insulated wire or cable

Conductor material	Copper
Conductor surface	Bare
Core insulation material	XLPE
Core identification (acc. HD 308 S2)	Yes
Material outer sheath	Polyvinyl chloride (PVC)
Max. conductor temperature [°C]	70
UV resistant	No
Permitted cable outer temperature during assembling/handling (min) [°C]	-15
Bending radius (rule)	EN 50565-1
Reaction-to-fire class (acc. EN 13501-6)	Eca
Flame retardant	In accordance with EN/IEC 60332-1-2

PRODUCT PROPERTIES

Conductor category	Class 1 = solid
Shape of conductor	Round
Nominal cross section conductor [mm²]	2.5
Number of cores	3
With protective conductor	Yes
Colour outer sheath	White
Nominal outer diameter [mm]	9
Current carrying capacity [A]	20
Conductor resistance at 20° C [Ohm/km]	7.41
Current carrying capacity in air [A]	31
Cable weight [kg/km]	140
Min. bending radius during installation [mm]	45
DOP number	1002770

Current load, Installation method A2 (e.g. in conduit inside wall), air 25°C

Item name	EAN-code (GTIN)	Packaging type	Standard packaging quantity
XPJ 500V 3G2,5 T500	4741532028211	Drum	500
XPJ 500V 3G2,5 R100/3600	4741532028143	Coil	100
XPJ 500V 3G2,5 P300	4741532028167	Drum	300
XPJ 500V 3G2,5 T1000	4741532028150	Drum	1,000