


ROBUS®

EMERGENCY

EMERGENCY PACK

5W, IP20

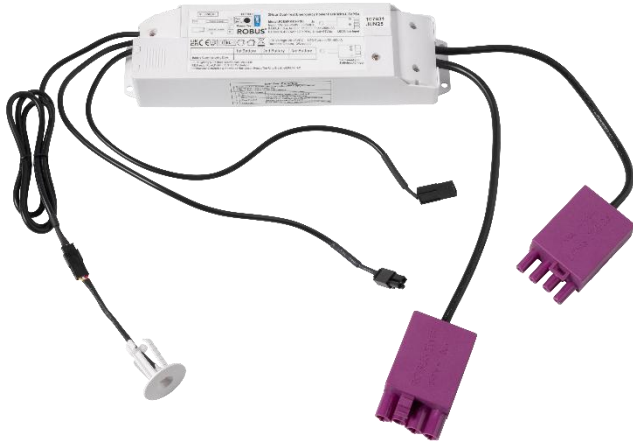

PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Polycarbonate housing
- Prewired with 250mm input and 400mm output cable and SWIFT connectors
- Green LED indicator with polycarbonate recessed mounting bracket

FEATURES

- Selectable between Manual Test facility and Self-Test facility that fully automates testing and maintenance process
- Completely plug & play with DALLAS EXPRESS, SPACE and STELLAR LED panels and GRANADA, MIRA and VIRTUE LED downlights therefore no tools required. Also suitable for ATMOS LED panels
- Allows fast and simple upgrade of standard fittings to emergency for increase light level or if exit routes change
- The emergency pack is designed to provide high lumen output therefore reducing the number of emergency fittings required compared to many other emergency packs on the market
- LiFePO4 battery technology provides fast charge, a high number of charge/discharge cycles and a 3 hour emergency light output



WARRANTY



LUMINAIRE LIFETIME



IP RATING



OPERATING VOLTAGE



SAFETY CLASS



BATTERY




BATTERY WARRANTY

Product Code:	
Total Power (W):	4.8
IP:	20
Operation Temperature (°C):	0 ≤ Ta ≤ +40
Inrush Current:	7.8A/6us
Dimensions LxWxH (mm):	230x60x37
Weight (kg):	0.5

Size of the emergency driver:
(W)60mm x (H)37mm x (L)230mm
Weight: 0.50kg

Typical Conversion Wiring Diagram

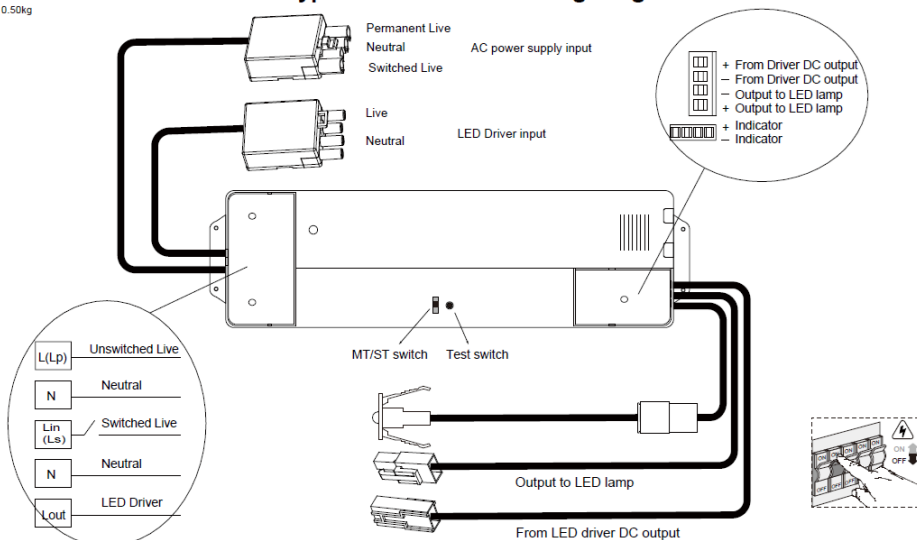

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.US.LED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA