

Junistar ECO Isosafe White DimToWarm 510lm 2000-2800K Ra>95 Trailing edge dimming

Article code: 905215
EAN: 7021989052159



Electrical

Wattage: 6W
System wattage: 7W
Voltage: 230V
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED (not exchangeable)
Light source included: Yes
Luminous flux: 510lm
Efficacy: 73 lm/W
Colour temperature: 2000-2800K
Colour rendering (CRI): Ra>95
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV

Energy and approvals

Energy class (2021-): F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor
Cable entry: Screwless terminal block

Dimensions (mm)

Width (mm) W: 90
Height (mm) H: 40
Diameter (D): 90
Cut-out (mm): 83
Weight (brutto/netto): 0.361 / 0.361

Packaging

Packing dimensions (mm): 122 x 121 x 95
Number per pack: 8

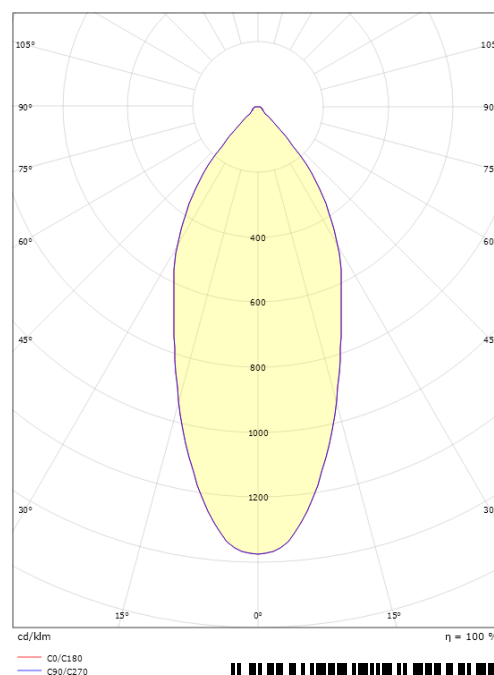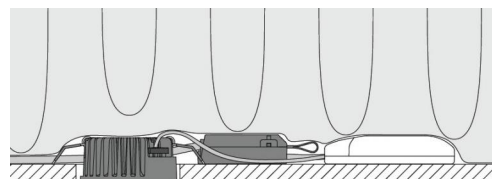

7 0 2 1 9 8 9 0 5 2 1 5 9