

Junistar Lux IsoSafe White 560lm 3000K Ra 98 Trailing edge dimming

Article code: 902519
 EAN: 7021989025191
 Replaces: 902341, 912381



Electrical

Wattage: 7W
 System wattage: 8W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED (not exchangeable)
 Socket: CoB Holder
 Luminous flux: 560lm
 Efficacy: 70 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 1
 Lifetime: L90/B10>50,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 42°

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV

Energy and approvals

Energy class (2021-): F
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: White (RAL 9003, 25% gloss)
 Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
 Cable entry: Screwless terminal block

Dimensions (mm)

Height (mm) H: 56
 Diameter (D): 94
 Cut-out (mm): 83
 Ceiling void depth: 54
 Weight (brutto/netto): 0.419 / 0.349

Packaging

Packing dimensions (mm): 115 x 115 x 95

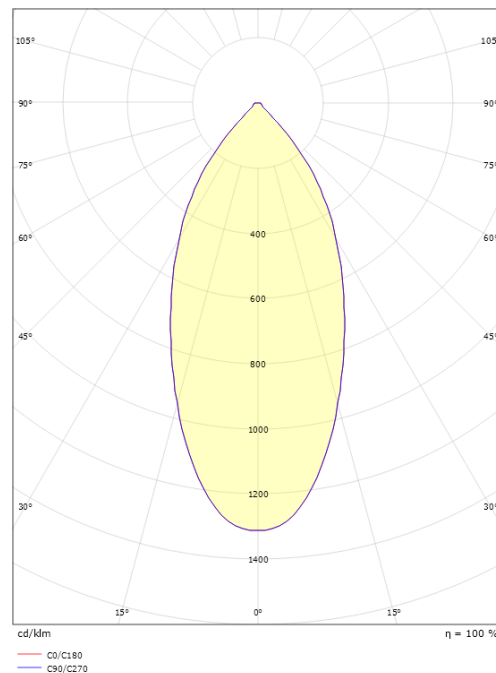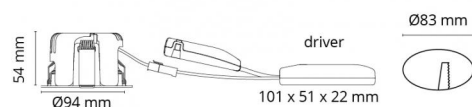

7 0 2 1 9 8 9 0 2 5 1 9 1