

Rax ECO 200 White 3000/4000K Ra>80 Trailing edge dimming

Article code: 212569
EAN: 7021982125690



Electrical

Wattage: 13W/24W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 40, B16: 60, C10: 40, C16: 60

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 1400lm/1490lm/2310lm/2460lm
Colour temperature: 3000/4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 95°
Visible flicker (PstLM): 0.04
Stroboscopic flicker (SVM): 0
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II

Energy and approvals

Energy class (2021-): E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Polycarbonat (PC)
Colour: White (RAL 9003)
Optics: PMMA (Acrylate)

Mounting/Connection



Mounting: Indoor
Plug: 3 pol Linect / screwless terminal block

Dimensions (mm)

Height (mm) H: 93
Diameter (D): 216
Cut-out (mm): 200
Ceiling void depth: 93
Weight (brutto/netto): 1.03 / 0.87

Packaging

Packing dimensions (mm): 240 x 222 x 120

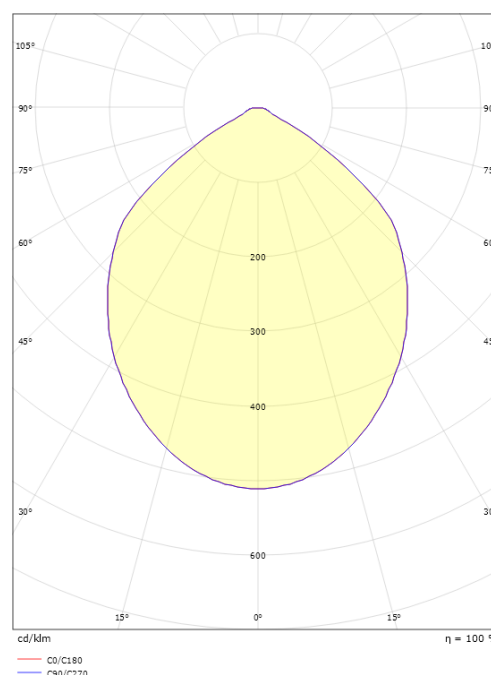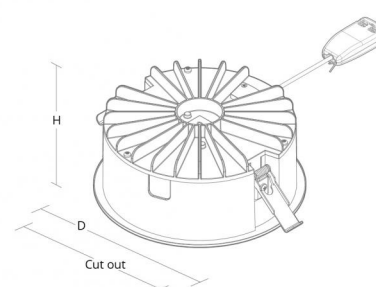

7 0 2 1 9 8 2 1 2 5 6 9 0