



# Corepro - LED HID HPL

# TForce Core LED HPL 26W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short payback to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post–Top lamps brings all the energy–efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post–Top lamps can be used for outdoor, as well as indoor applications.

### **Warnings and Safety**

• Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

# **Product data**

| General Information                |                    |
|------------------------------------|--------------------|
| Cap-Base                           | E27 [E27]          |
| Nominal lifetime                   | 25,000 hour(s)     |
| Switching Cycle                    | 15,000             |
| Lighting Technology                | LED                |
| Flux measurement reference         | Sphere             |
|                                    |                    |
| Light Technical                    |                    |
| Color Code                         | 840 [CCT of 4000K] |
| Beam Angle (Nom)                   | 300 degree(s)      |
| Luminous Flux                      | 4,000 lumen        |
| Color Designation                  | Cool White (CW)    |
| Correlated Color Temperature (Nom) | 4000 K             |
|                                    |                    |

| Luminous Efficacy (rated) (Nom)       | 153 lm/W    |
|---------------------------------------|-------------|
| Color Consistency                     | <6          |
| Color rendering index (CRI)           | 80          |
| LLMF At End Of Nominal Lifetime (Nom) | 0.7 %       |
|                                       |             |
| Operating and Electrical              |             |
| Line Frequency                        | 50 to 60 Hz |
| Input Frequency                       | 50 to 60 Hz |
| Power Consumption                     | 26 W        |
| Lamp Current (Nom)                    | 145 mA      |
| Wattage Equivalent                    | 125 W       |
| Starting Time (Nom)                   | 0.5 s       |
| Warm-up time to 60% light             | 0.5 s       |


Datasheet, 2023, May 16 data subject to change

# Corepro - LED HID HPL

| Power Factor (Fraction)       | 0.9             |  |
|-------------------------------|-----------------|--|
| Voltage (Nom)                 | 220-240 V       |  |
|                               |                 |  |
| Temperature                   |                 |  |
| Ambient temperature range     | -20 °C to 45 °C |  |
| T-Case Maximum (Nom)          | 54 °C           |  |
|                               |                 |  |
| Controls and Dimming          |                 |  |
| Dimmable                      | No              |  |
|                               |                 |  |
| Mechanical and Housing        |                 |  |
| Bulb Finish                   | Frosted         |  |
| Bulb Shape                    | ED90 [ED 90mm]  |  |
|                               |                 |  |
| Approval and Application      |                 |  |
| Energy Consumption kWh/1000 h | 26 kWh          |  |


| EPREL Registration Number       | 403,623                            |
|---------------------------------|------------------------------------|
| CE mark                         | Yes                                |
| EU RoHS compliant               | Yes                                |
|                                 |                                    |
| Product Data                    |                                    |
| Full product code               | 871869975035000                    |
| Order product name              | TForce Core LED HPL 26W E27 840 FR |
| Order code                      | 929002350202                       |
| Numerator - Quantity Per Pack   | 1                                  |
| Numerator - Packs per outer box | 6                                  |
| Material number (12NC)          | 929002350202                       |
| Full product name               | TForce Core LED HPL 26W E27 840 FR |
| EAN/UPC - Case                  | 8718699750367                      |
|                                 |                                    |

# Dimensional drawing




| Product                            | D     | С      |
|------------------------------------|-------|--------|
| TForce Core LED HPL 26W E27 840 FR | 90 mm | 245 mm |

# Photometric data








Light Distribution Diagram - TForce Core LED HPL 26W E27 840 FR


# Corepro - LED HID HPL


### Photometric data



Calculus Preconectics 4.5 Prings Lighting B.V. Page: 17

### Lifetime

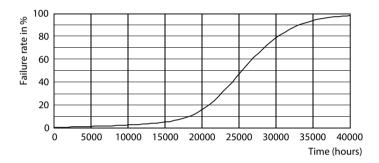



Life Expectancy Diagram - TForce Core LED HPL 26W E27 840 FR

Lumen Maintenance Diagram - TForce Core LED HPL 26W E27 840 FR



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.