EASY-PROTECT

Gel box

with WAGO COMPACT Splicing Connectors

Gel filled housings for easy, fast and safe moisture protection of WAGO COMPACT Splicing Connectors




Product description

Article name	EASY-PROTECT 515		
Material number	410359		
Characteristics	Protects the splicing connector against moisture and water ingress according to IPX8		
	VDE type-tested system according to EN 60998-2 for approval in conjunction with		
	WAGO COMPACT conjunction with WAGO COMPACT Splicing Connectors 221		
	Rigid, label-free and silicone-free gel		
	UV-resistant housing, robust and re-accessible housing		
	Quick, safe and easy assembly		
	Ready-to-use		
Applications	Indoor and Outdoor		
	Can be used in the low-voltage range without an additional housin		
	Can be used in the low-voltage range with additional housing (double insulation /		
	observe protection class II)		
Family notes	Not reusable		
Copyright	WAGO is a registered trademark of WAGO Verwaltungsellschaft mbH		



Technical-Data-Sheet

Technical data

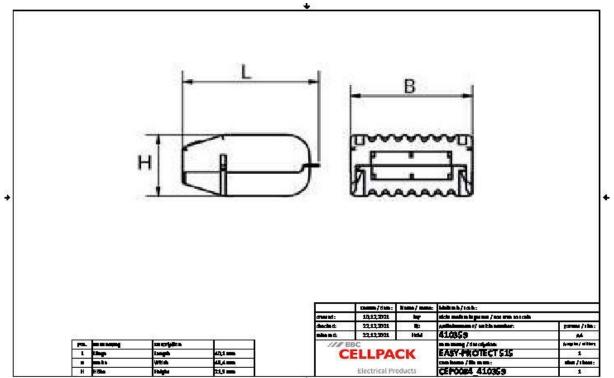

Voltage levels	U0/U (Um) 0,6/1 (1,2) kV		
Test standards	EN 60998-2		
Length L	40.1 m		
Width B	49.4 mm		
Heigth H	21.3 mm		
Nominal cross section min	0.5 mm ²		
Nominal cross section max	6 mm ²		
IP protection class	IPX8		
IP protection class (associated standard)	IEC 60529		
Housing colour	black		
Housing material	Polypropylene		
Closure type	Latching		
Wiring direction	One-sided		
Gel colour	Translucent amber		
Gel Material	Polyurethan		
Voltage range	450 V		
Voltage range (associated standard)	IEC 60998-2		
Flammability class housing	V2		
Flammability class housing (associated standard)	UL 94		
Rated surge voltage	4 kV		
Rated surge voltage (associated standard)	IEC 60998-2		
Rated current	32 A		
Rated current WAGO Klemme 221	41 A		
Rated current (associated standard)	IEC 60998-2		
Ambient temperature (operation)	85 °C		
Ambient temperature (operation) (associated standard)	IEC 60998-2		
Operating temperature range max	105 °C		
Operating temperature range (associated standard)	IEC 60998-2		
Dielectric strength	≥ 15 kV/mm		
Dielectric strength (associated standard)	IEC 60243-1		



Technical-Data-Sheet

Housing type	5
Number of housing	1 Pieces
Connector type	221-615
Number of connector	1 Pieces



Logistics data

Delivery scope	Pre-filled gel box			
	WAGO COMPACT Splicing Connector type 221			
	EASY-PROTECT 515: 1x221-615			
Shelf life description	Unlimited shelf life			
Storage temperatur max	40 °C			
Storage temperatur min	0 °C			
Country of origin	Italy			
Customs tariff number	85369010			

EAN-UPC	4010311189857			
Base quantity	1	1	1	50
Base unit of measure	Piece	Piece	Piece	Piece
Alternate quantity	1	1	1	1
Alternative unit of measure	Piece	Case	Pack	Carton
Lenght	200	200	200	340
Width	80	80	80	260
Height	30	30	30	200
Dimension unit	Millimetres	Millimetres	Millimetres	Millimetres
Volume	0.48	0.48	0.48	17.68
Volume unit	Cubic decimetres	Cubic decimetres	Cubic decimetres	Cubic decimetres
Gross weight	0.047	0.047	0.047	2.6
Net weight	0.047	0.047	0.047	2.35
Weight unit	Kilogram	Kilogram	Kilogram	Kilogram

