

Product data sheet

Specifications



Harmony, Miniature plug-in relay, 3 A, 4 CO, with LED, with lockable test button, 230 V AC

RXM4GB2P7

Main

| | |
|--|----------------------------------|
| Range of product | Harmony Electromechanical Relays |
| Series name | Miniature |
| Product or component type | Plug-in relay |
| Device short name | RXM |
| Contacts type and composition | 4 C/O |
| [Uc] control circuit voltage | 230 V AC 50/60 Hz |
| [Ithe] conventional enclosed thermal current | 3 A at -40...55 °C |
| Status LED | With |
| Control type | Lockable test button |
| Utilisation coefficient | 20 % |

Complementary

| | |
|--|---|
| Shape of pin | Flat |
| [Ui] rated insulation voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL |
| [Uimp] rated impulse withstand voltage | 2.5 kV during 1.2/50 µs |
| Contacts material | Gold plated bifurcated silver |
| [Ie] rated operational current | 2 A at 28 V (DC) NO conforming to IEC 2 A at 250 V (AC) NO conforming to IEC 1 A at 28 V (DC) NC conforming to IEC 1 A at 250 V (AC) NC conforming to IEC 3 A at 28 V (DC) conforming to UL 3 A at 277 V (AC) conforming to UL |
| Maximum switching voltage | 250 V conforming to IEC |
| Resistive rated load | 3 A at 250 V AC 3 A at 28 V DC |
| Maximum switching capacity | 750 VA/84 W |
| Minimum switching capacity | 15 mW at 3 mA, 5 V |
| Operating rate | <= 1200 cycles/hour under load <= 18000 cycles/hour no-load |
| Mechanical durability | 10000000 cycles |
| Electrical durability | 100000 cycles for resistive load depending on mounting position and working environment |

| | |
|----------------------------------|-----------------------------|
| Average coil consumption in VA | 1.2 at 60 Hz |
| Average consumption | 1.2 VA at 60 Hz |
| Drop-out voltage threshold | >= 0.15 Uc |
| Operate time | 20 ms |
| Release time | 20 ms |
| Average coil resistance | 15000 Ohm at 20 °C +/- 15 % |
| Rated operational voltage limits | 184...253 V AC |
| Protection category | RT I |
| Test levels | Level A group mounting |
| Operating position | Any position |
| Net weight | 0.037 kg |
| Device presentation | Complete product |

Environment

| | |
|---------------------------------------|---|
| Dielectric strength | 1300 V AC between contacts with micro disconnection 2000 V AC between coil and contact 2000 V AC between poles |
| Product certifications | Lloyd's GOST CE UL CSA |
| Standards | CSA C22.2 No 14 UL 508 EN/IEC 61810-1 |
| Ambient air temperature for storage | -40...85 °C |
| Ambient air temperature for operation | -40...55 °C |
| Vibration resistance | 3 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles in operation 5 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles not operating |
| IP degree of protection | IP40 conforming to EN/IEC 60529 |
| Shock resistance | 10 gn for in operation 30 gn for not operating |
| Pollution degree | 2 |

Packing Units


| | |
|------------------|----------|
| Package 1 Weight | 0.039 kg |
| Package 1 Height | 0.410 dm |
| Package 1 width | 0.210 dm |
| Package 1 Length | 0.280 dm |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |

| | |
|---------------------------|--|
| China RoHS Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| Contractual warranty | |
| Warranty | 18 months |


Dimensions

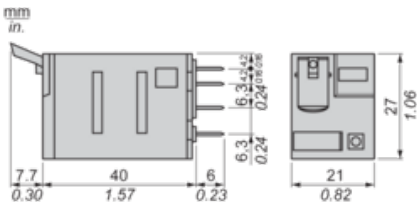

Pin Side View



Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Electrical Durability of Contacts


Durability (inductive load) = durability (resistive load) x reduction coefficient.

Resistive AC load

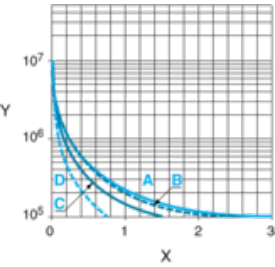


- X Switching capacity (kVA)
- Y Durability (Number of operating cycles)
- A RXM2AB...
- B RXM3AB...
- C RXM4AB...
- D RXM4GB...

Reduction coefficient for inductive AC load (depending on power factor cos φ)

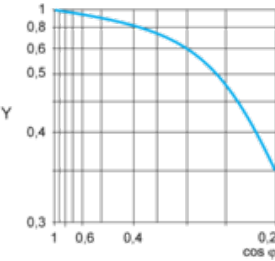

- Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

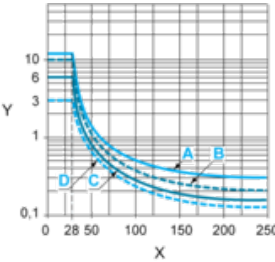

- X Voltage DC
- Y Current DC
- A RXM2AB...
- B RXM3AB...
- C RXM4AB...
- D RXM4GB...

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.