

Soft Square White 910lm 3000K Ra 98 Trailing edge dimming

Article code: 903261
EAN: 7021989032618



Electrical

System wattage: 12W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

Light technic

Type of light source: LED
Luminous flux: 910lm
Efficacy: 76 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra 98
MacAdams factor: SDCM: 1
Lifetime: L80/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 60°

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)

Mounting/Connection




Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 95
Width (mm) W: 95
Height (mm) H: 58
Depth (D): 57
Cut-out (mm): 83
Weight (kg) gross/net: 0.498 / 0.436

Packaging

Packing dimensions (mm): 170 x 115 x 85

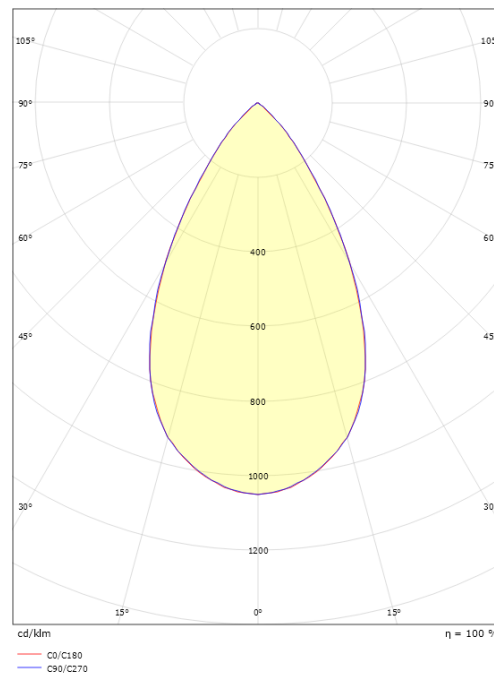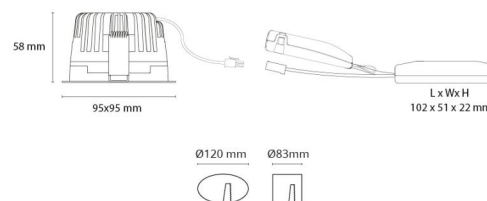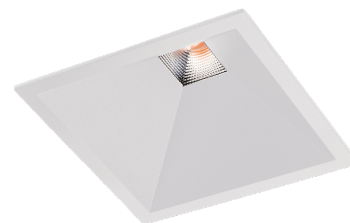

7 0 2 1 9 8 9 0 3 2 6 1 8