



# Earthing connector set SE15

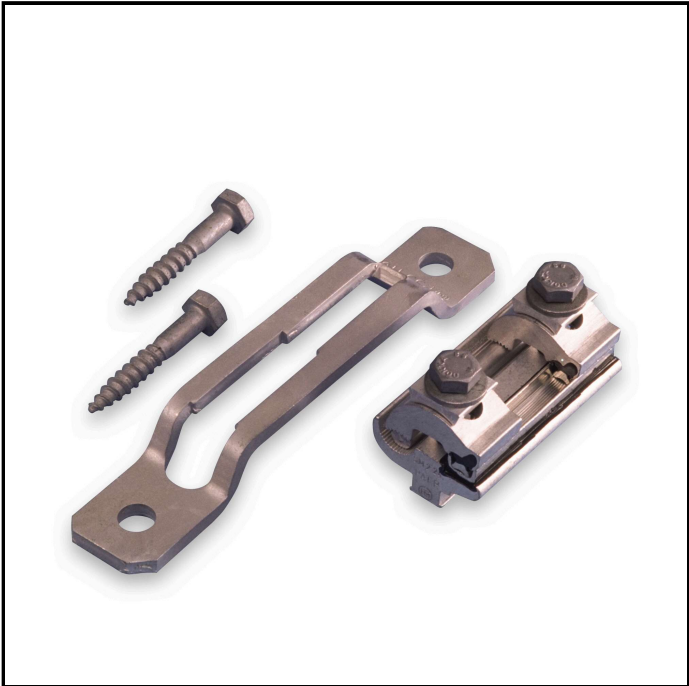

SE15 is used for connection of an earthing conductor. Connector support PSS116 ensures that there is sufficient clearance between the pole surface and the connector so that any pole impregnation does not impair the connection.

**Code** SE15  
**GTIN** 6418677401848  
**Name** Earthing connector set  
Fe or Al 16-120 mm<sup>2</sup> and Cu 6-35 mm<sup>2</sup>

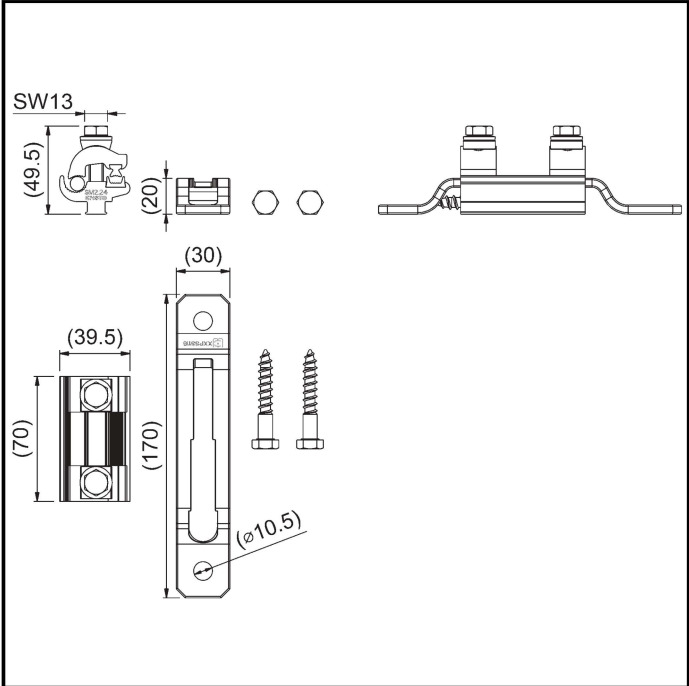

## Dimensions

---

Weight	0.37 kg
Main conductor mm <sup>2</sup>	Fe/Al 16-120
Branch conductor mm <sup>2</sup>	Cu 6-35
Conductor diameter mm	4.5-14 / 2.8-7.5

## Certificates

---

Standards	SFS 2663
-----------	----------

## Features

---

Bolt	2xM8
Connectors	SM 2.24

## Mechanical

---

Tightening torque Nm	20 Nm
----------------------	-------

## Packaging

### Plastic bag

---

Size	1 pce
Depth	300 mm
Height	10 mm
Width	152 mm
Weight	0.374 kg
Volume	0.456 l

### Carton

---

Size	25 pcs
Depth	375 mm
Height	115 mm
Width	250 mm
Weight	9.566 kg
Volume	10.78125 l

### Pallet package

---

Size	1575 pcs
Depth	1200 mm
Height	1050 mm
Width	800 mm
Weight	622.658 kg
Volume	1008 l

**Downloads**

[Installation instruction](#)

---

File type: PDF



[Dimensional drawing](#)

---

File type: PDF

